


# Iris

Radiatore da bagno in acciaio con collettori laterali 40x30 mm e tubi tondi orizzontali da 25 mm. Iris viene fornito anche in versione solo elettrico.

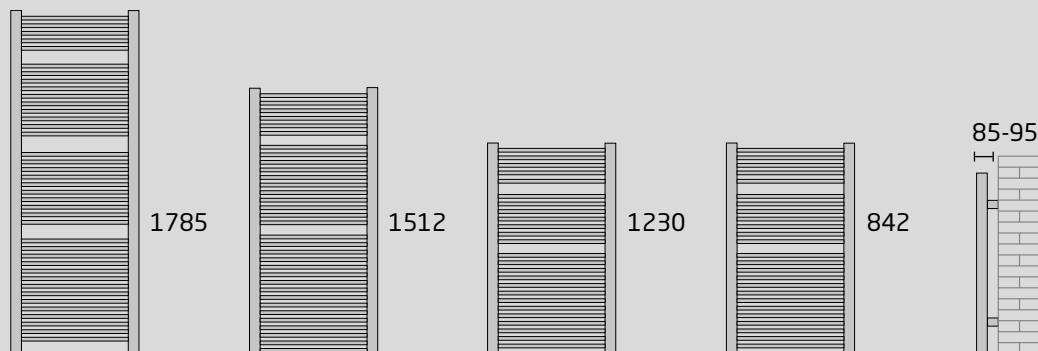

*Iris*

# Iris

	A	L	I	kg	W	W	W	W	W
<b>DRITTO</b>	842	400	350	6,24	3,14	342	300	<b>IRS4001</b>	
	842	450	400	7,21	3,61	385	300	<b>IRS4501</b>	
	842	500	450	7,87	3,93	426	300	<b>IRS5001</b>	
	842	550	500	8,53	4,26	467	300	<b>IRS5501</b>	
	842	600	550	9,18	4,59	508	500	<b>IRS6001</b>	
	842	650	600	10,14	4,97	550	500	<b>IRS6501</b>	
	1230	400	350	7,96	4,98	478	500	<b>IRL4001</b>	
	1230	450	400	9,52	5,60	538	500	<b>IRL4501</b>	
	1230	500	450	10,08	6,16	605	500	<b>IRL5001</b>	
	1230	550	500	10,64	6,72	673	700	<b>IRL5501</b>	
	1230	600	550	11,42	7,28	740	700	<b>IRL6001</b>	
	1230	650	600	12,94	7,89	802	700	<b>IRL6501</b>	
	1230	750	700	14,93	9,10	942	1000	<b>IRL7501</b>	
	1512	400	350	9,76	5,97	585	500	<b>IRG4001</b>	
	1512	450	400	11,65	6,72	658	700	<b>IRG4501</b>	
	1512	500	450	12,32	7,28	736	700	<b>IRG5001</b>	
	1512	550	500	13,22	7,84	813	700	<b>IRG5501</b>	
	1512	600	550	14,00	8,40	890	1000	<b>IRG6001</b>	
1512	650	600	15,86	9,10	964	1000	<b>IRG6501</b>		
1512	750	700	16,65	9,44	1122	1000	<b>IRG7501</b>		
1785	400	350	13,52	7,47	697	700	<b>IRX4001</b>		
1785	450	400	15,68	8,40	784	1000	<b>IRX4501</b>		
1785	500	450	16,91	9,24	863	1000	<b>IRX5001</b>		
1785	550	500	18,37	10,08	942	1000	<b>IRX5501</b>		
1785	600	550	20,05	10,92	1020	1000	<b>IRX6001</b>		
1785	650	600	21,97	11,83	1105	1000	<b>IRX6501</b>		
1785	750	700	24,60	13,70	1257	1000	<b>IRX7501</b>		
<b>CURVO</b>	842	500	450	7,87	3,93	426	300	<b>LIS5001</b>	
	842	600	550	9,18	4,59	508	500	<b>LIS6001</b>	
	1230	500	450	10,08	6,16	605	500	<b>LIL5001</b>	
	1230	600	550	11,42	7,28	740	700	<b>LIL6001</b>	
	1512	500	450	12,32	7,28	736	700	<b>LIG5001</b>	
	1512	600	550	14,00	8,40	890	1000	<b>LIG6001</b>	
	1785	500	450	16,91	9,24	863	1000	<b>LIX5001</b>	
	1785	600	550	20,05	10,92	1020	1000	<b>LIX6001</b>	
1785	750	700	24,60	13,70	1257	1000	<b>LIX7501</b>		

	A	L	I	kg	W	W	W	W
<b>DRITTO CROMATO</b>	842	400	350	6,24	3,14	236	300	<b>IRS40G</b>
	842	450	400	7,21	3,61	265	300	<b>IRS45G</b>
	842	500	450	7,87	3,93	292	300	<b>IRS50G</b>
	842	550	500	8,53	4,26	319	300	<b>IRS55G</b>
	842	600	550	9,18	4,59	346	500	<b>IRS60G</b>
	1230	400	350	7,96	4,98	321	300	<b>IRL40G</b>
	1230	450	400	9,52	5,60	361	300	<b>IRL45G</b>
	1230	500	450	10,08	6,16	400	500	<b>IRL50G</b>
	1230	550	500	10,64	6,72	439	500	<b>IRL55G</b>
	1230	600	550	11,42	7,28	479	500	<b>IRL60G</b>
	1230	750	700	14,93	9,10	597	700	<b>IRL75G</b>
	1512	400	350	9,76	5,97	395	500	<b>IRG40G</b>
	1512	450	400	11,65	6,72	444	500	<b>IRG45G</b>
	1512	500	450	12,32	7,28	491	500	<b>IRG50G</b>
	1512	550	500	13,22	7,84	539	500	<b>IRG55G</b>
	1512	600	550	14,00	8,40	587	700	<b>IRG60G</b>
	1512	750	700	16,65	9,44	731	700	<b>IRG75G</b>
	1785	400	350	13,52	7,47	478	500	<b>IRX40G</b>
1785	450	400	15,68	8,40	538	700	<b>IRX45G</b>	
1785	500	450	16,91	9,24	593	700	<b>IRX50G</b>	
1785	550	500	18,37	10,08	649	700	<b>IRX55G</b>	
1785	600	550	20,05	10,92	705	700	<b>IRX60G</b>	
1785	750	700	24,60	13,70	872	1000	<b>IRX75G</b>	

	A	L	I	kg	W	W	W	W
<b>CURVO CROMATO</b>	842	500	450	7,87	3,93	292	300	<b>LIS50G</b>
	1230	500	450	10,08	6,16	400	300	<b>LIL50G</b>
	1230	600	550	11,42	7,28	479	500	<b>LIL60G</b>
	1512	500	450	12,32	7,28	491	500	<b>LIG50G</b>
	1512	600	550	14,00	8,40	587	700	<b>LIG60G</b>
	1785	500	450	16,91	9,24	593	700	<b>LIX50G</b>
1785	600	550	20,05	10,08	705	700	<b>LIX60G</b>	



Resa termica misurata secondo EN 442,  $\Delta T$  50 K (75/65/20° C)

