


Ksenia

Radiatore da bagno in acciaio con collettori laterali 40x30 mm e tubi orizzontali da 22 mm. Sarà viene fornito anche in versione solo elettrico.

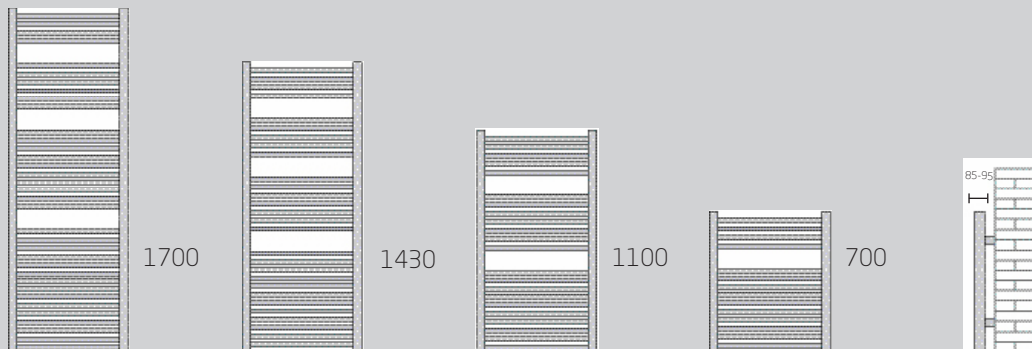

Ksenia

	K	L	I			W		
	700	450	400	6,2	2,7	314	300	KLS4501
	700	500	450	6,7	3	344	300	KLS5001
	700	550	500	7,25	3,25	368	300	KLS5501
	700	600	550	7,8	3,5	391	300	KLS6001
DRITTO	1100	450	400	9,50	5	468	500	KLM4501
	1100	500	450	10,10	5,5	512	500	KLM5001
	1100	550	500	10,75	6	556	500	KLM5501
	1100	600	550	11,40	6,5	599	700	KLM6001
	1430	450	400	11,60	6	612	700	KLG4501
	1430	500	450	12,30	6,5	669	700	KLG5001
	1430	550	500	13,15	7	727	700	KLG5501
	1430	600	550	14,00	7,5	784	700	KLG6001
	1700	450	400	15,21	7,38	721,8	700	KLX4501
	1700	500	450	16,90	8,2	802	1000	KLX5001
1700	550	500	18,45	8,95	871	1000	KLX5501	
1700	600	550	20	9,7	940	1000	KLX6001	
1700	750	700	21,20	11,30	1147	1000	KLX7501	

	700	450	400	6,2	2,7	314	300	KCS4501
	700	500	450	6,7	3	344	300	KCS5001
	700	550	500	7,25	3,25	368	300	KCS5501
	700	600	550	7,8	3,5	391	300	KCS6001
CURVO	1100	450	400	9,50	5	468	500	KCM4501
	1100	500	450	10,10	5,5	512	500	KCM5001
	1100	550	500	10,75	6	606	500	KCM5501
	1100	600	550	11,40	6,5	699	700	KCM6001
	1430	450	400	11,60	6	612	700	KCG4501
	1430	500	450	12,30	6,5	669	700	KCG5001
	1430	550	500	13,15	7	727	700	KCG5501
	1430	600	550	14,00	7,5	784	700	KCG6001
	1700	450	400	15,21	7,38	722	700	KCX4501
	1700	500	450	16,90	8,2	802	1000	KCX5001
1700	550	500	18,45	8,95	871	1000	KCX5501	
1700	600	550	20	9,7	940	1000	KCX6001	

	K	L	I			W		
	700	450	400	6,2	2,7	254	300	KLS45G
	700	500	450	6,7	3	275	300	KLS50G
	700	550	500	7,25	3,25	296	300	KLS55G
	700	600	550	7,8	3,5	316	300	KLS60G
DRITTO CROMKTO	1100	450	400	9,50	5	383	500	KLM45G
	1100	500	450	10,10	5,5	419	500	KLM50G
	1100	550	500	10,75	6	454	500	KLM55G
	1100	600	550	11,40	6,5	490	500	KLM60G
	1430	450	400	11,60	6	500	500	KLG45G
	1430	500	450	12,30	6,5	548	500	KLG50G
	1430	550	500	13,15	7	595	700	KLG55G
	1430	600	550	14,00	7,5	642	700	KLG60G
	1700	450	400	15,21	7,38	591	700	KLX45G
	1700	500	450	16,90	8,2	657	700	KLX50G
1700	550	500	18,45	8,95	713	700	KLX55G	
1700	600	550	20	9,7	770	1000	KLX60G	
1700	750	700	21,20	11,30	893	1000	KLX75G	

	700	450	400	6,2	2,7	254	300	KCS45G
	700	500	450	6,7	3	275	300	KCS50G
	700	550	500	7,25	3,25	296	300	KCS55G
	700	600	550	7,8	3,5	316	300	KCS60G
CURVO CROMKTO	1100	450	400	9,50	5	383	500	KCM45G
	1100	500	450	10,10	5,5	419	500	KCM50G
	1100	550	500	10,75	6	454	500	KCM55G
	1100	600	550	11,40	6,5	490	500	KCM60G
	1430	450	400	11,60	6	500	500	KCG45G
	1430	500	450	12,30	6,5	548	500	KCG50G
	1430	550	500	13,15	7	595	700	KCG55G
	1430	600	550	14,00	7,5	642	700	KCG60G
	1700	450	400	15,21	7,38	591	700	KCX45G
	1700	500	450	16,90	8,2	657	700	KCX50G
1700	550	500	18,45	8,95	713	700	KCX55G	
1700	600	550	20	9,7	770	1000	KCX60G	



Ksenia



Resa termica misurata secondo EN 442, ΔT 50 K (75/65/20° C)