
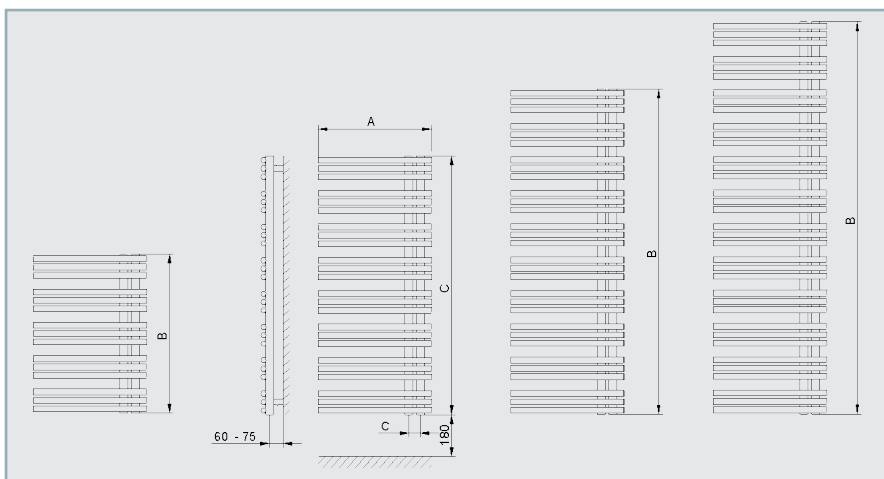
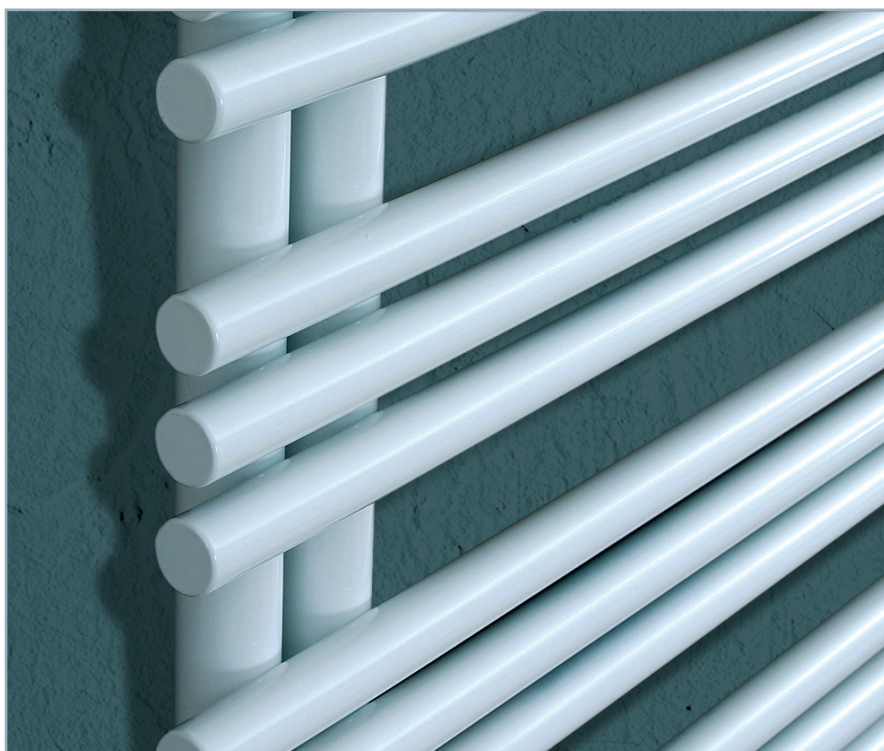


# NINFEA

Rohre

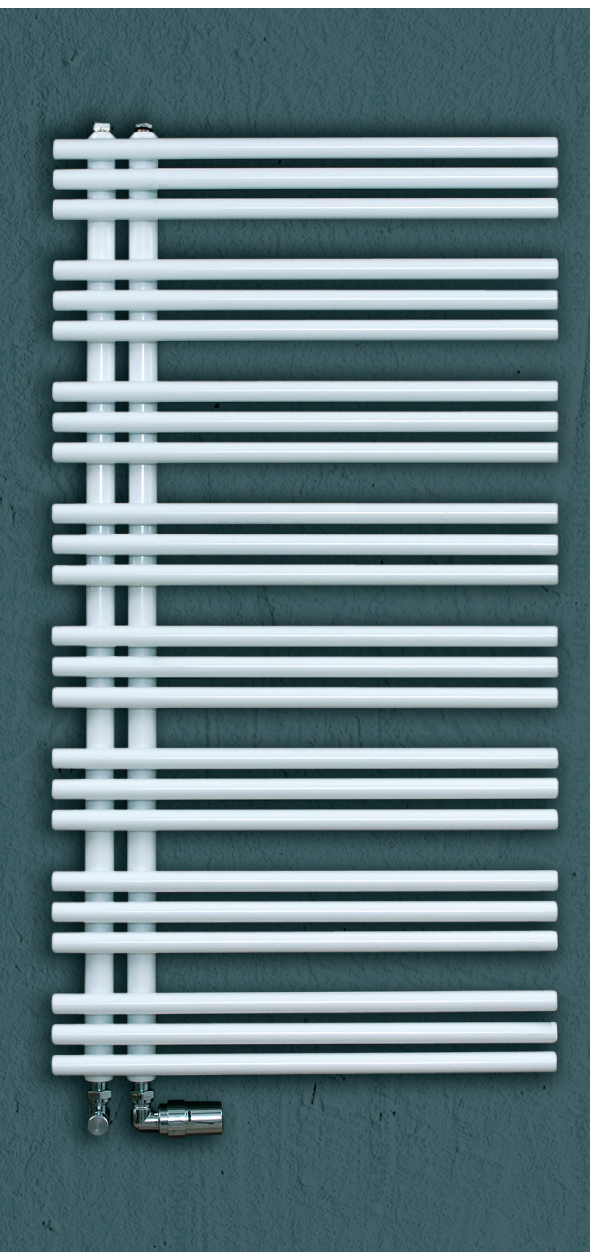

MAXIMALER DRUCK: 10 BAR - ANSCHLUSS: 50MM 1/2" - UMDREHBAR

NINFEA	Breite A	Höhe B	Nabenabs C	Leistung		Gewicht	Wasserinh.	Rohre
	mm	mm	mm	W (75/65/20 °C)	W (55/45/20 °C)	kg	dm³	db
NIS5001	500	685	50	346	178	12	4,0	15
NIS6001	600	685	50	402	208	14	4,6	15
NIM5001	500	1115	50	555	287	18	6,5	24
NIM6001	600	1115	50	645	333	21	7,5	24
NIL5001	500	1405	50	690	356	23	7,5	30
NIL6001	600	1405	50	810	418	27	9	30
NIX5001	500	1695	50	835	431	26	9,8	36
NIX6001	600	1695	50	969	500	31	11,2	36