

# Cristallino




## EVO


Technical sheet

CE



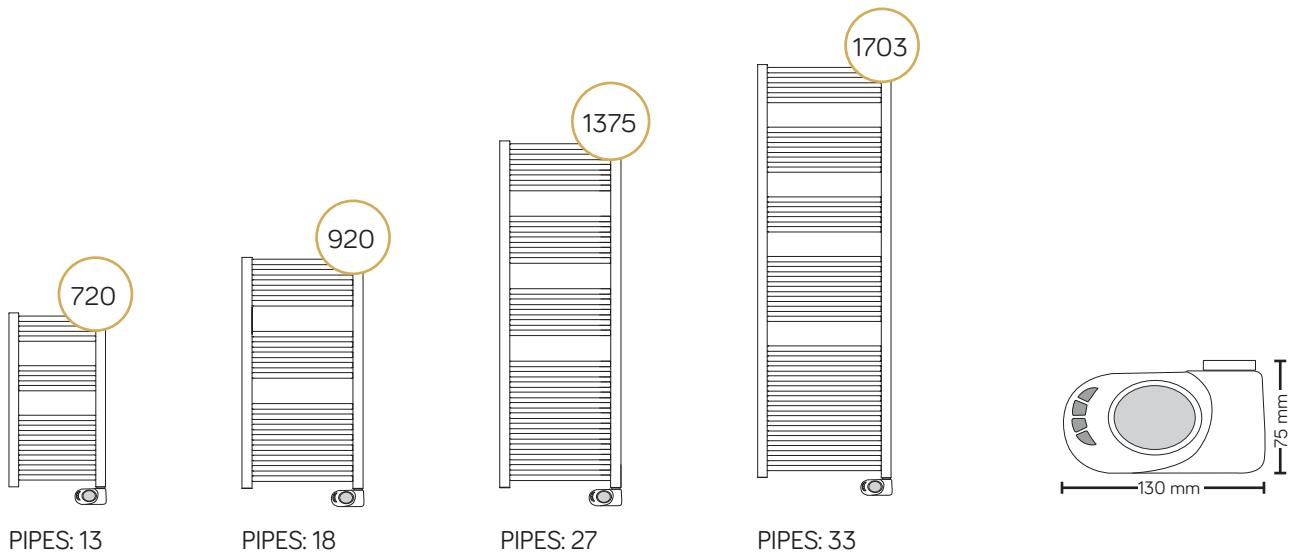

Description	Straight
Material	Carbon steel
Pipes - Ø	22x0,9
Collectors - mm	40x30x1,5 - «D» shape
Wall fixings	3
Max temperature	75 °C
Paint	Epoxypolyester powder
Packaging	Cardboard box, styrofoam protections and external nylon shrink wrap
Protection rate	IP24
Electrical insulation	Class 2
Power source	230V - 50Hz
Heating element protection system	Overtemperature cut-out
Wire	Straight with shuko plug. Length approx. 1000 mm
Standard equipment	1 kit wall fixing brackets

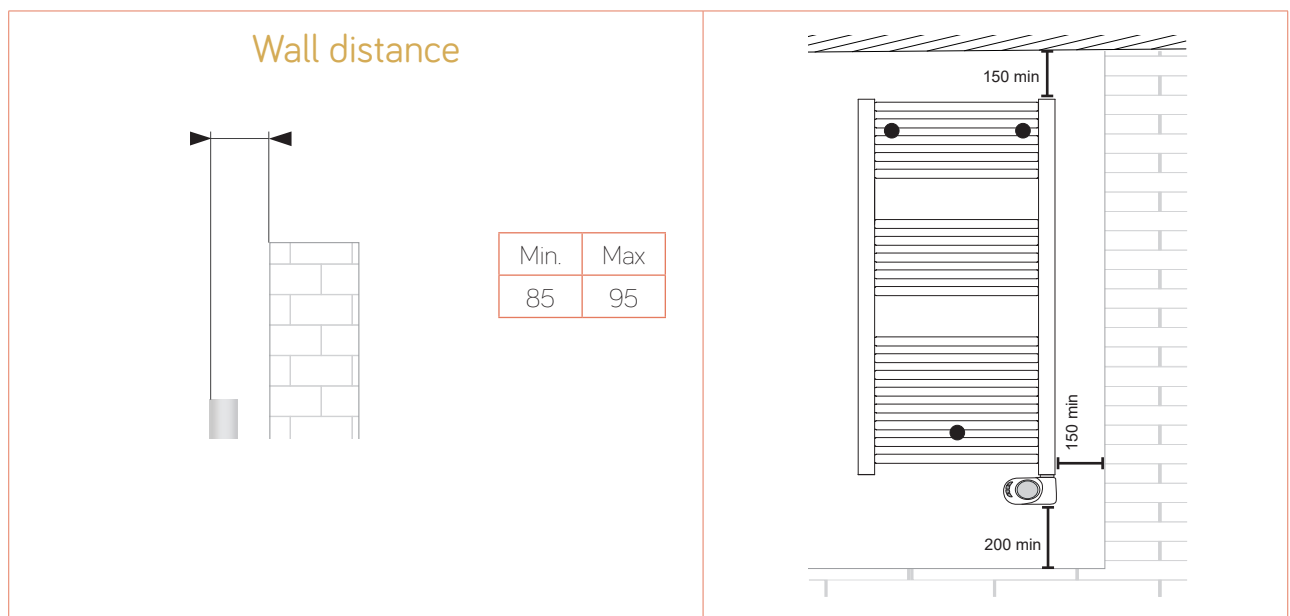

## Anthracite VOV12 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C
CRSA	720	400	7,7	300	258	1024	105
CRLA	920	480	9,4	500	430	1706	105
CRCA	1375	480	14,7	750	649	2559	105
CRXA	1703	550	22,1	1000	860	3412	105

### MAIN FUNCTIONS OF THE DIGITAL THERMOSTAT

